

FIG. 1 is a perspective view of a rectangular frame assembly 10, including a front panel 20 and a back panel 30, which are connected by a plurality of vertical and horizontal support members 40. The front panel 20 is shown in a perspective view, and the back panel 30 is shown in a perspective view. The support members 40 are shown in a perspective view. The front panel 20 is shown in a perspective view, and the back panel 30 is shown in a perspective view. The support members 40 are shown in a perspective view.

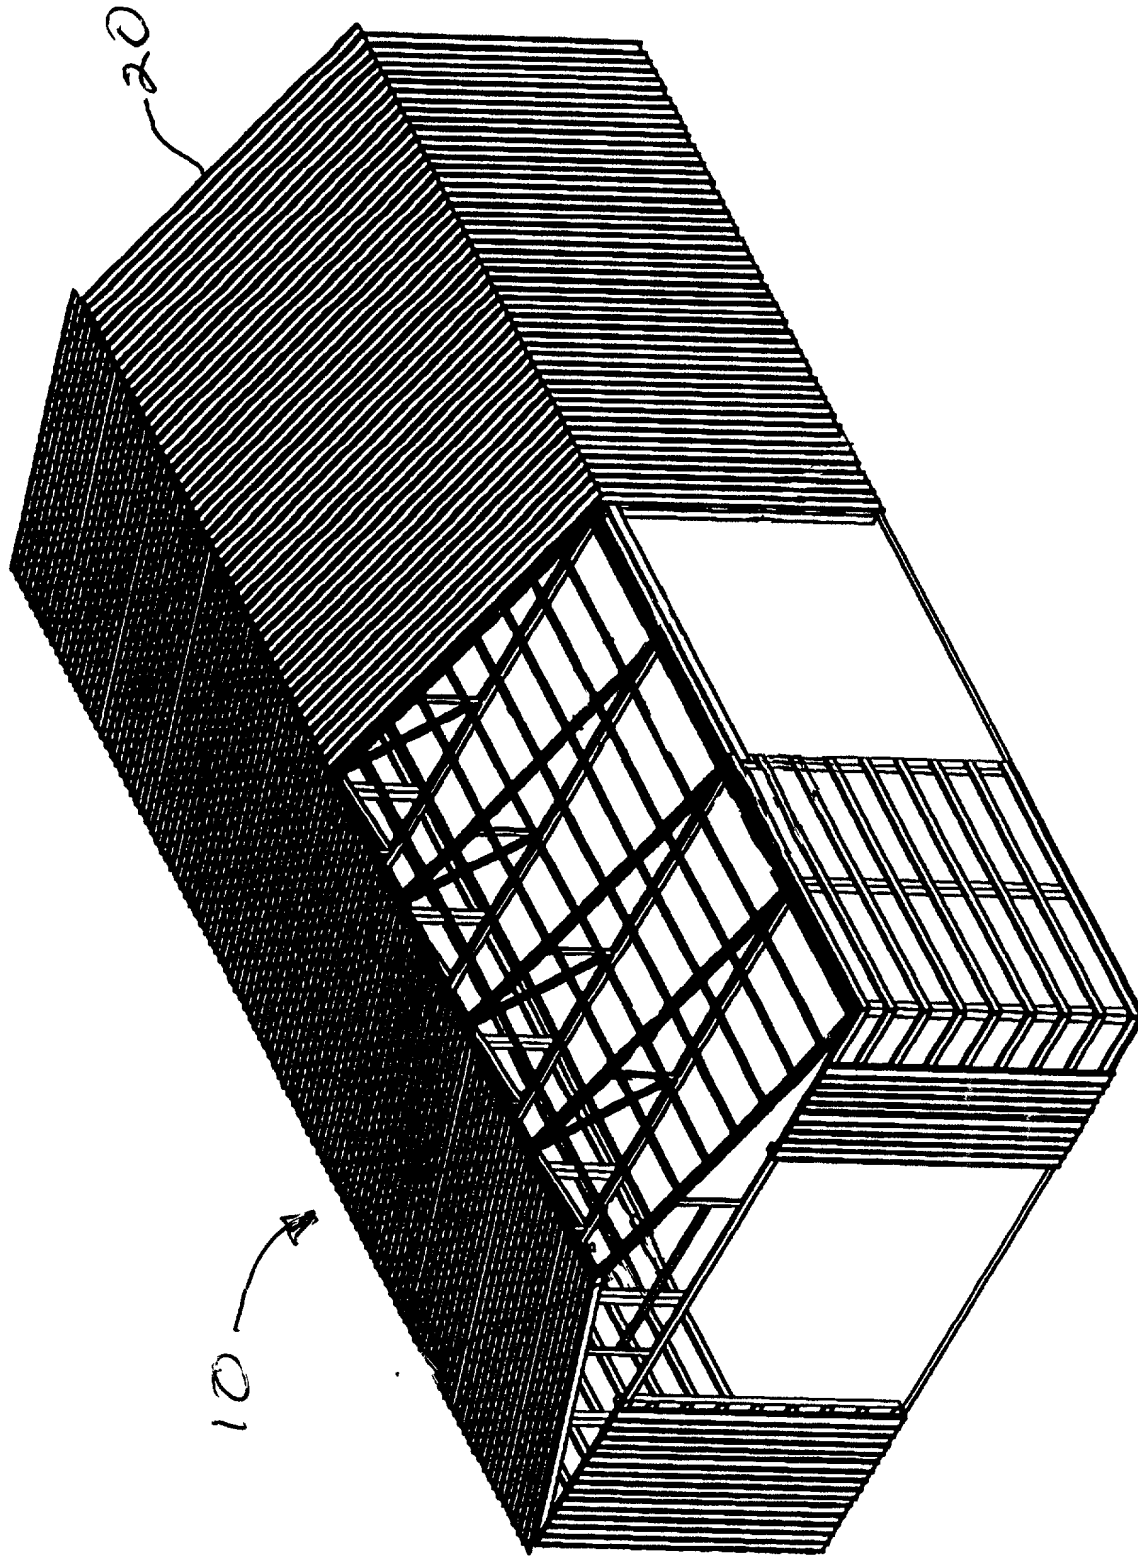


FIG. 1



FIG. 3

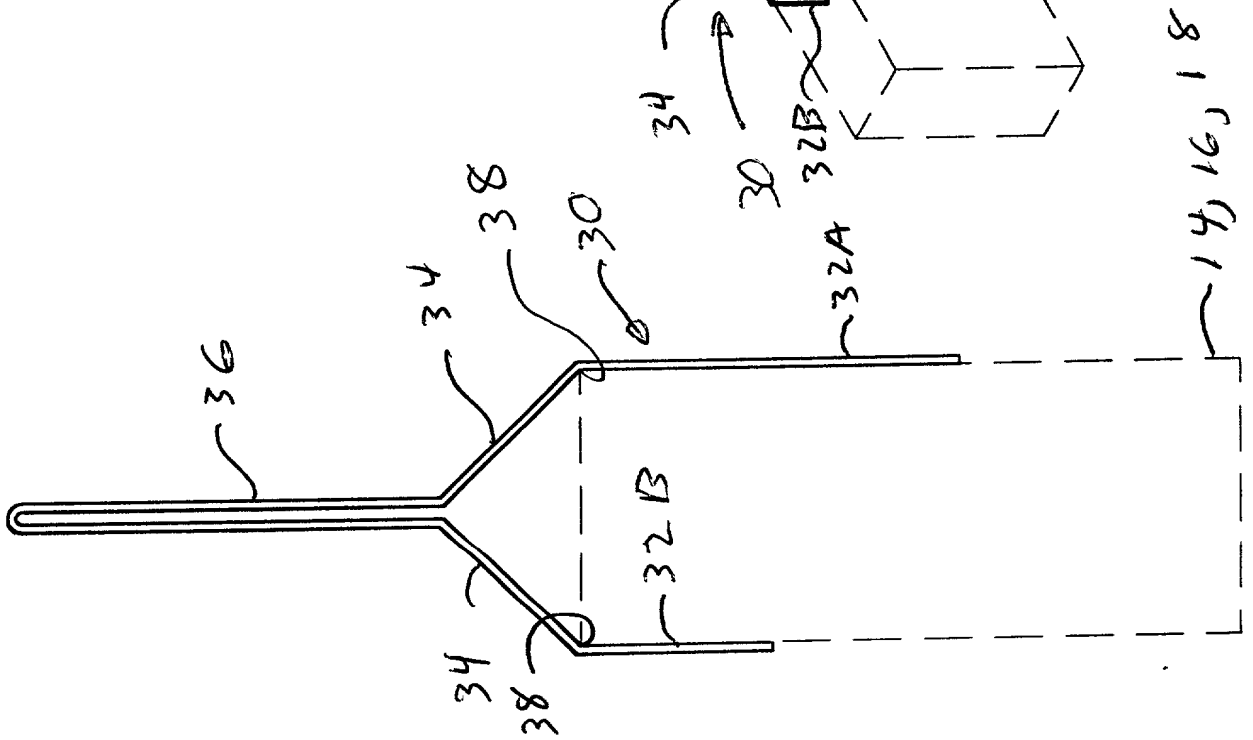


FIG. 4

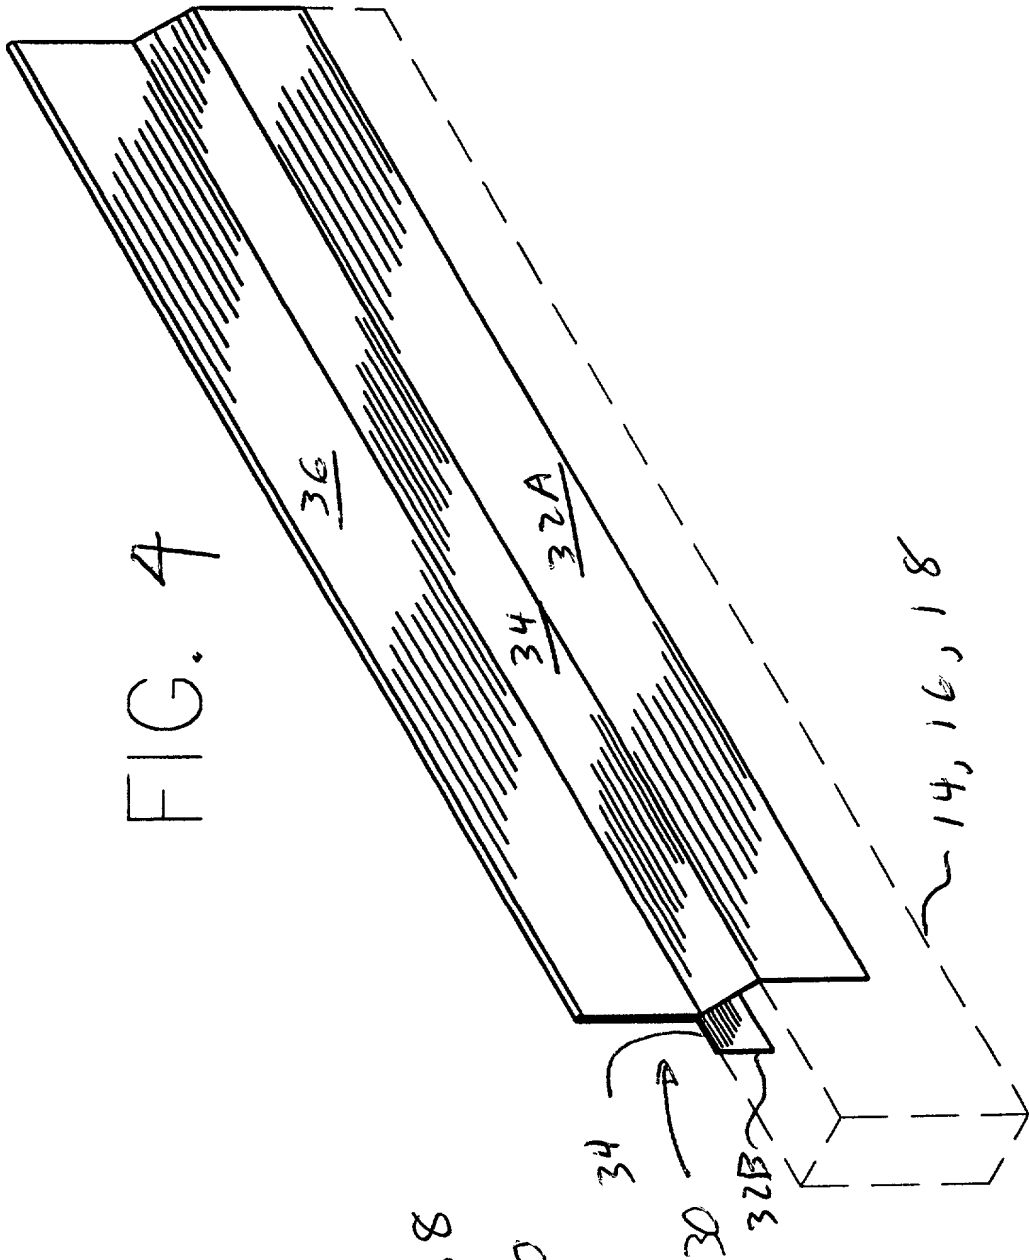


FIG. 5

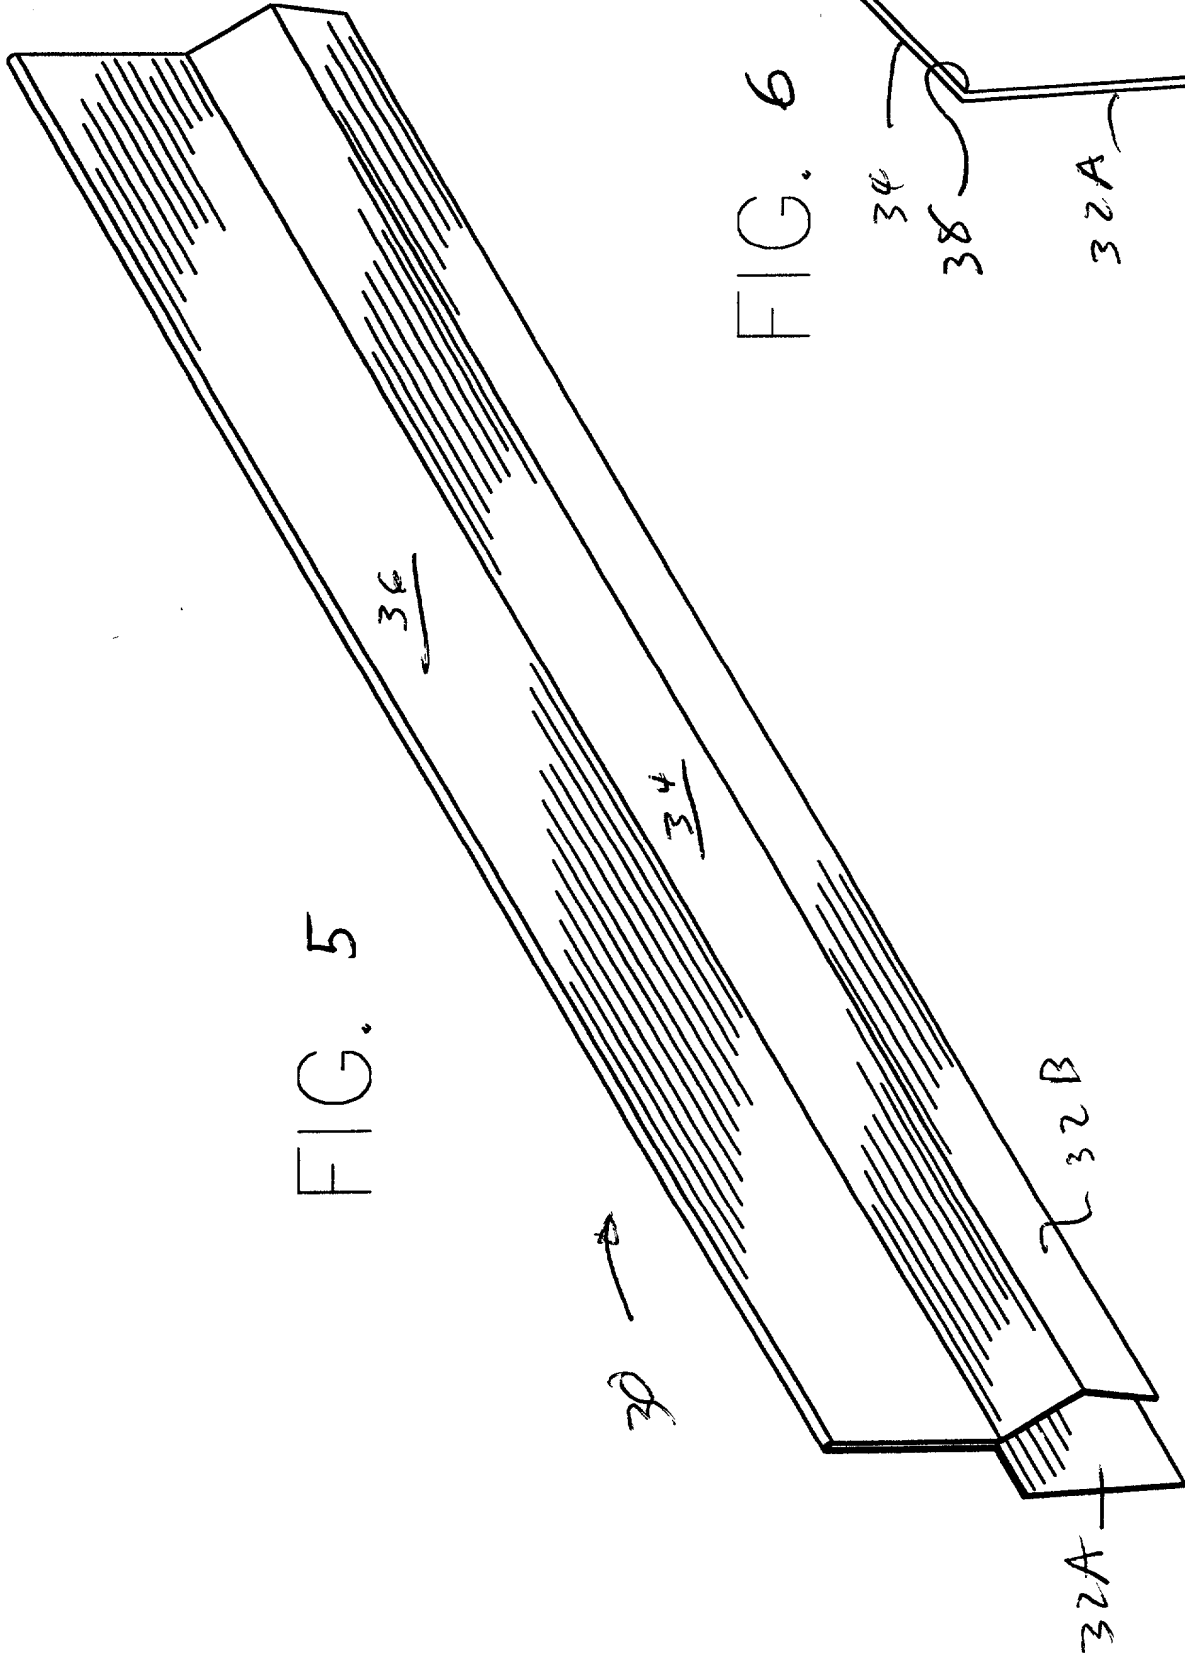


FIG. 6

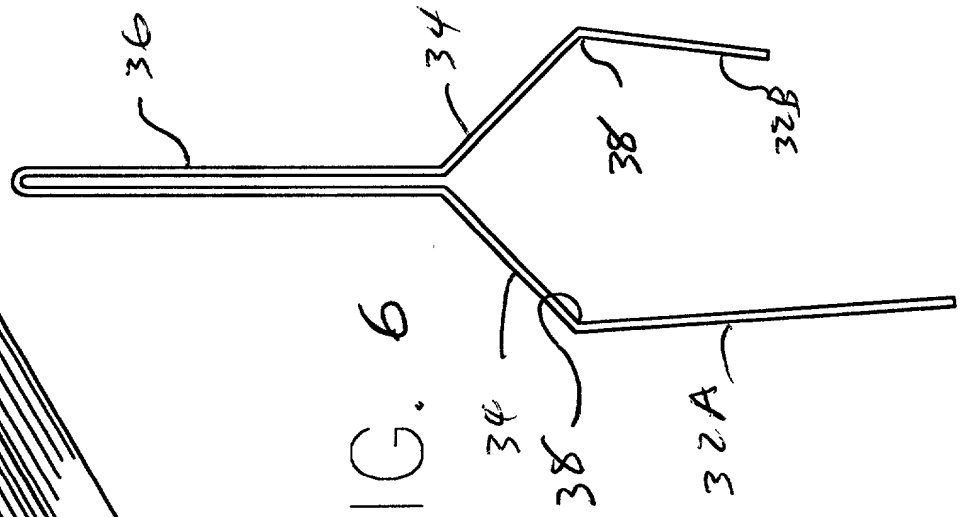


FIG. 7

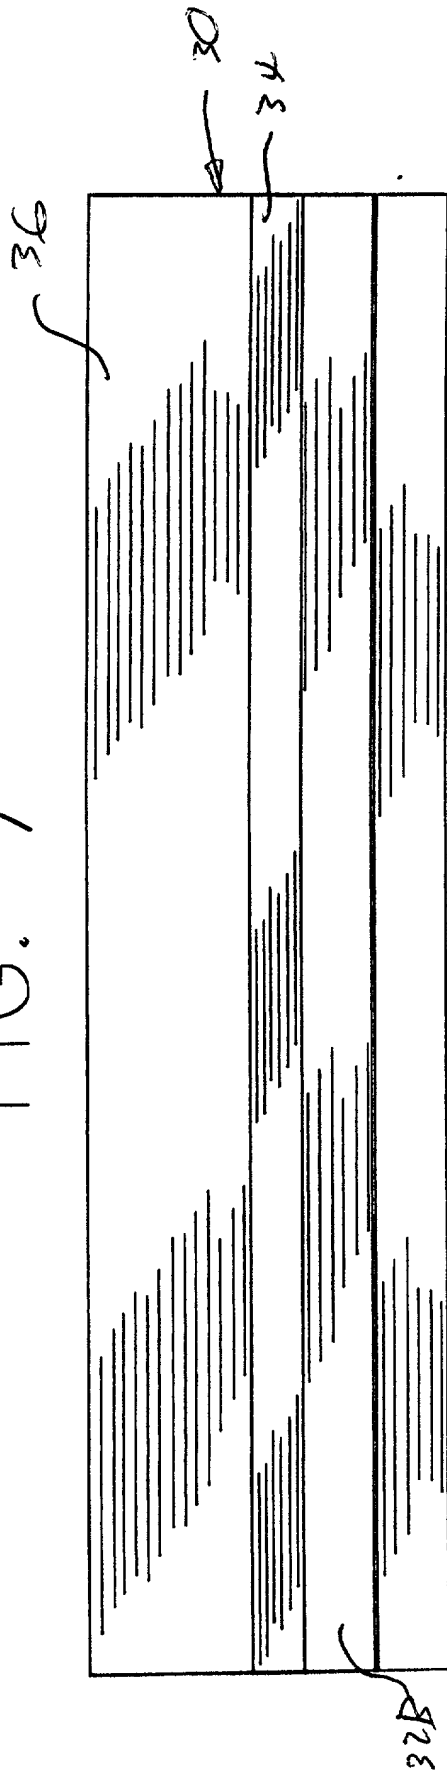


FIG. 8

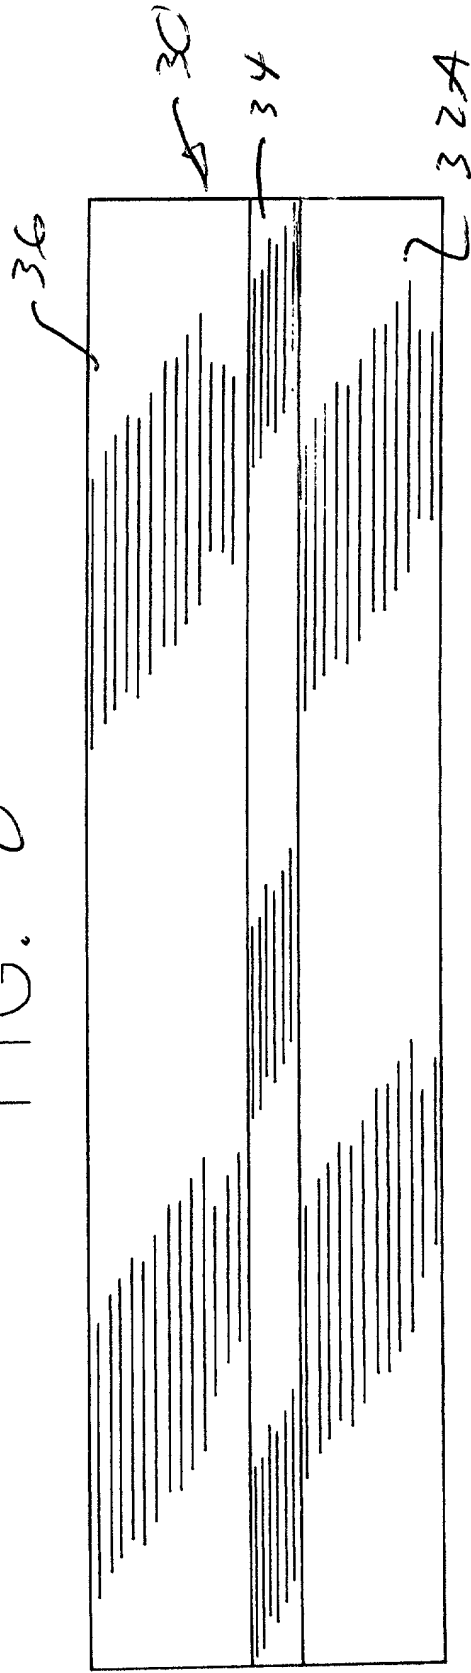


FIG. 9






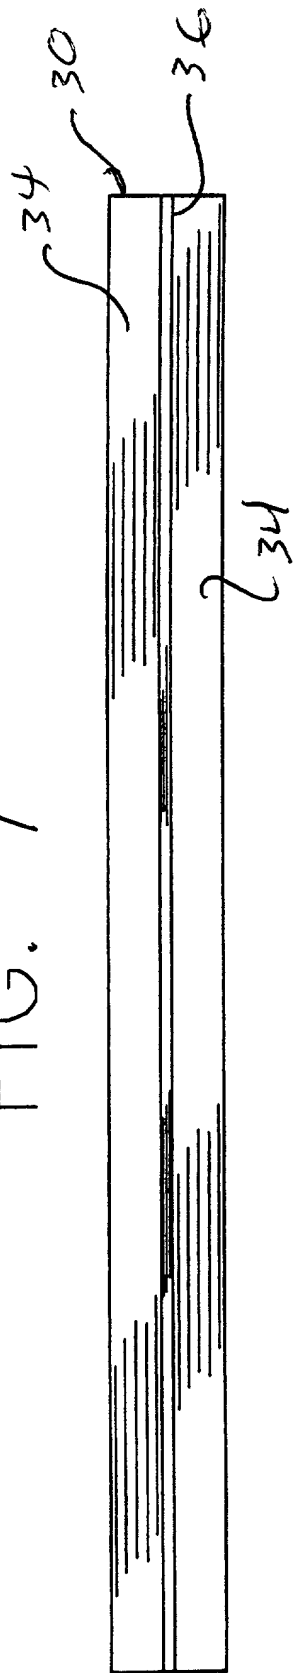


FIG. 10

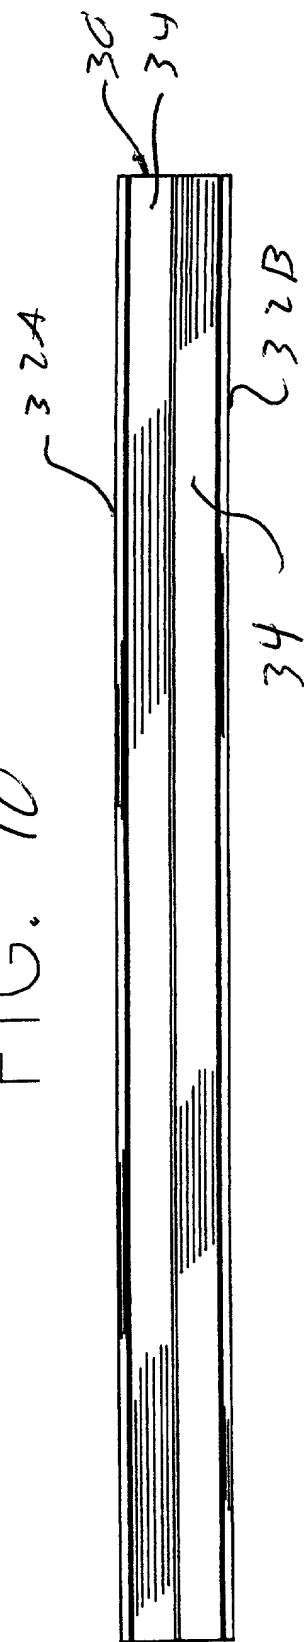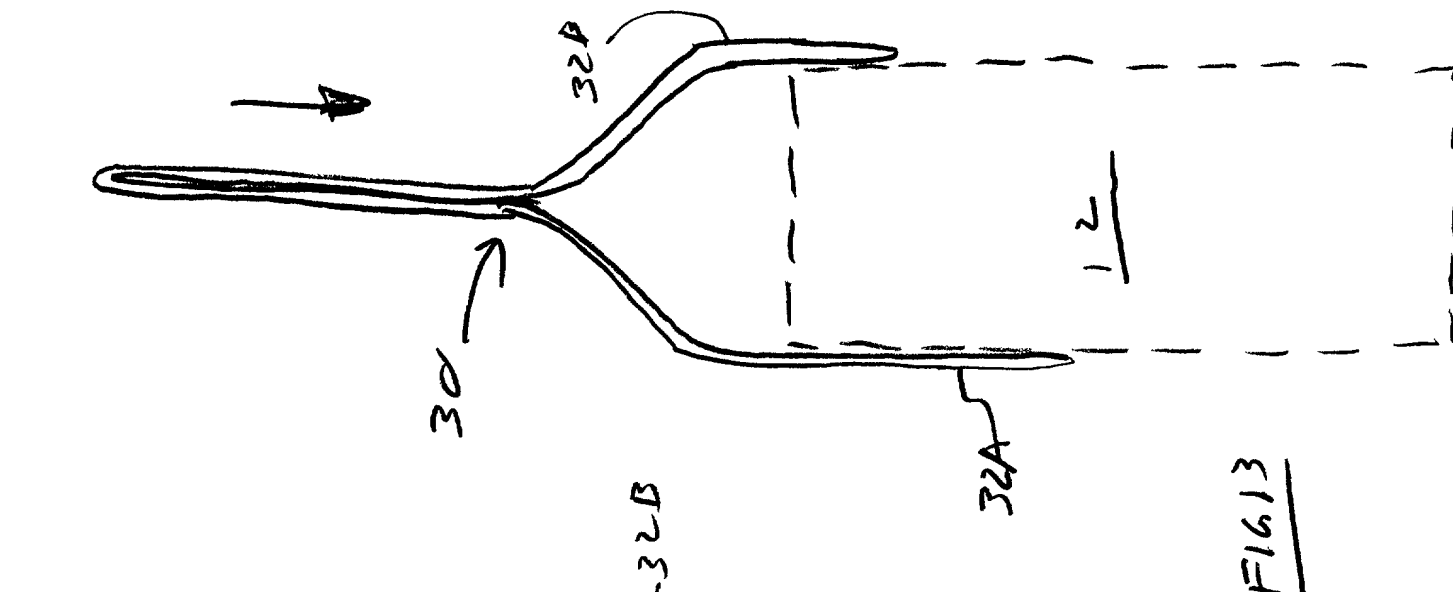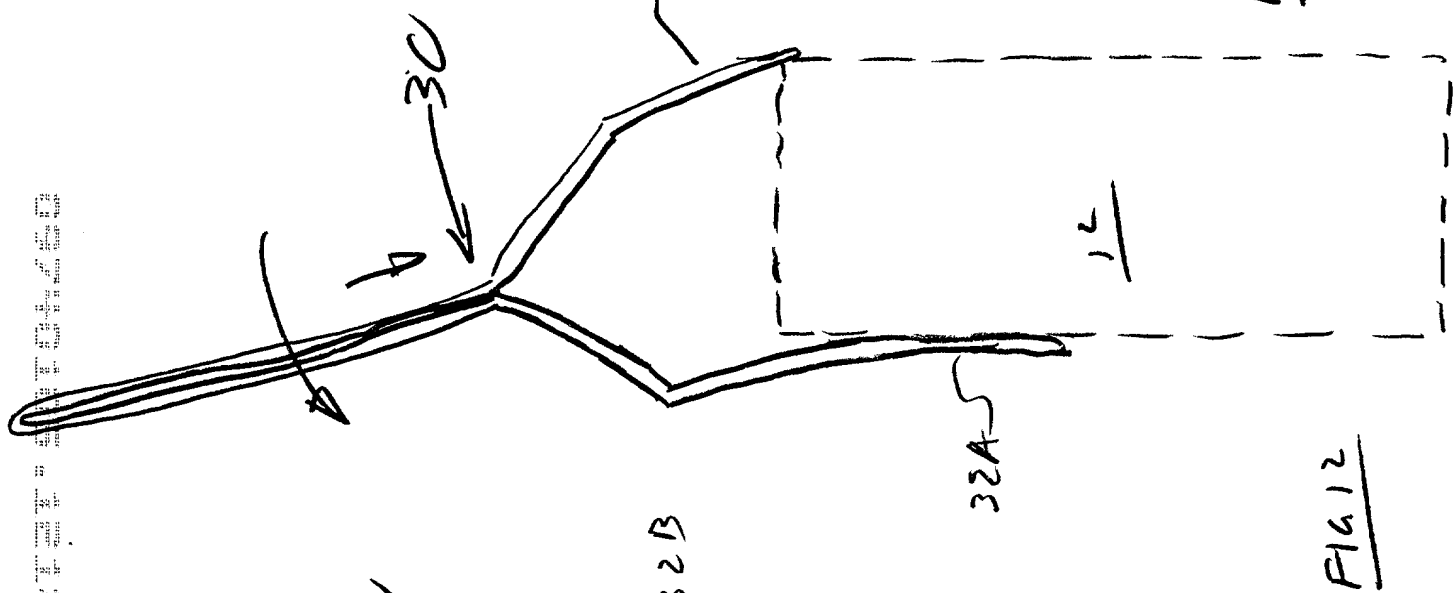

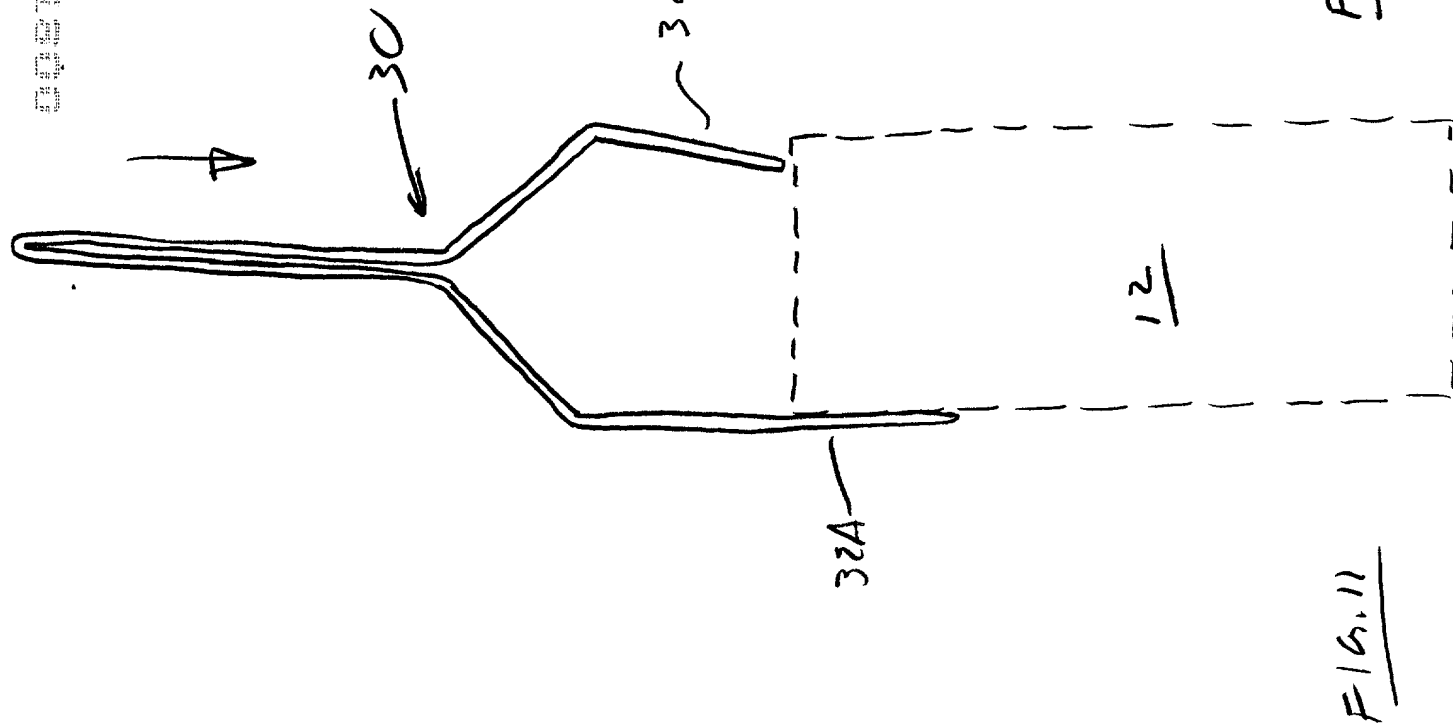

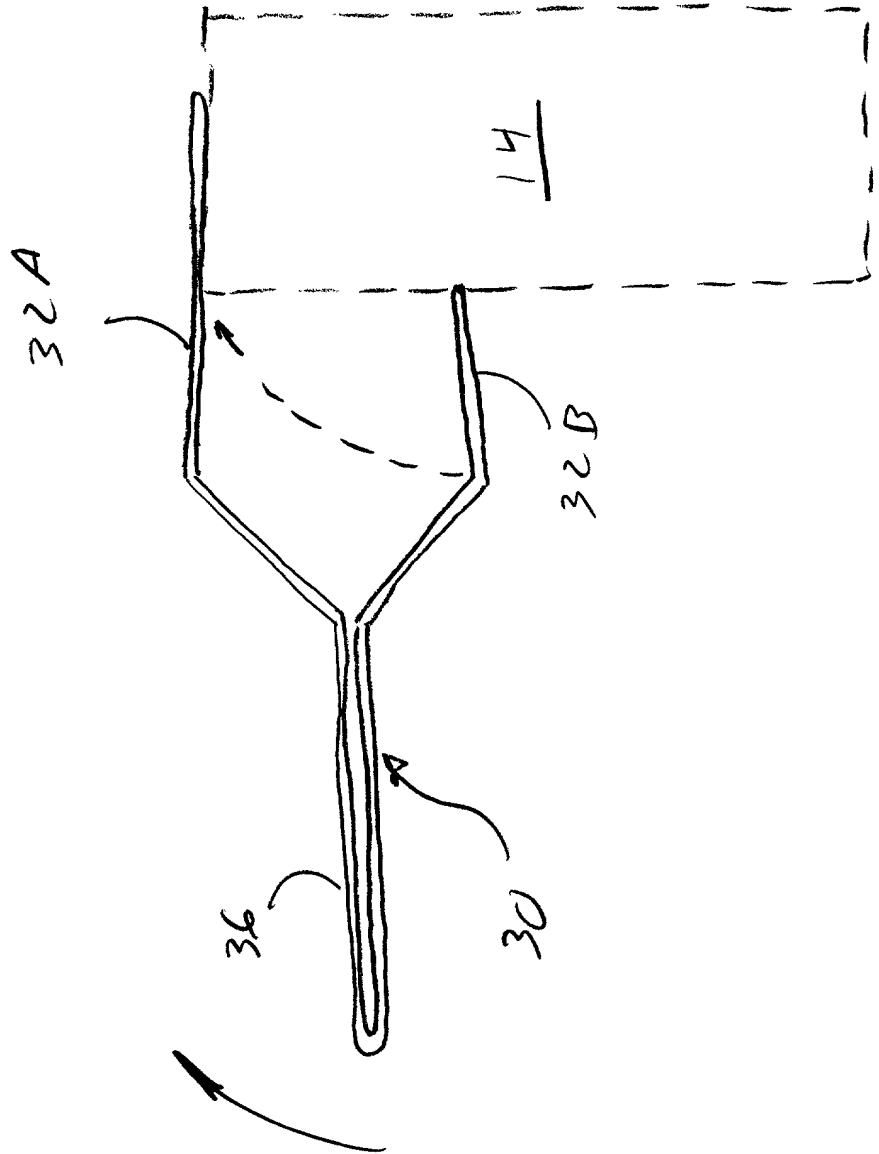

---

41

32B

30

36

F16.14



FIG. 15

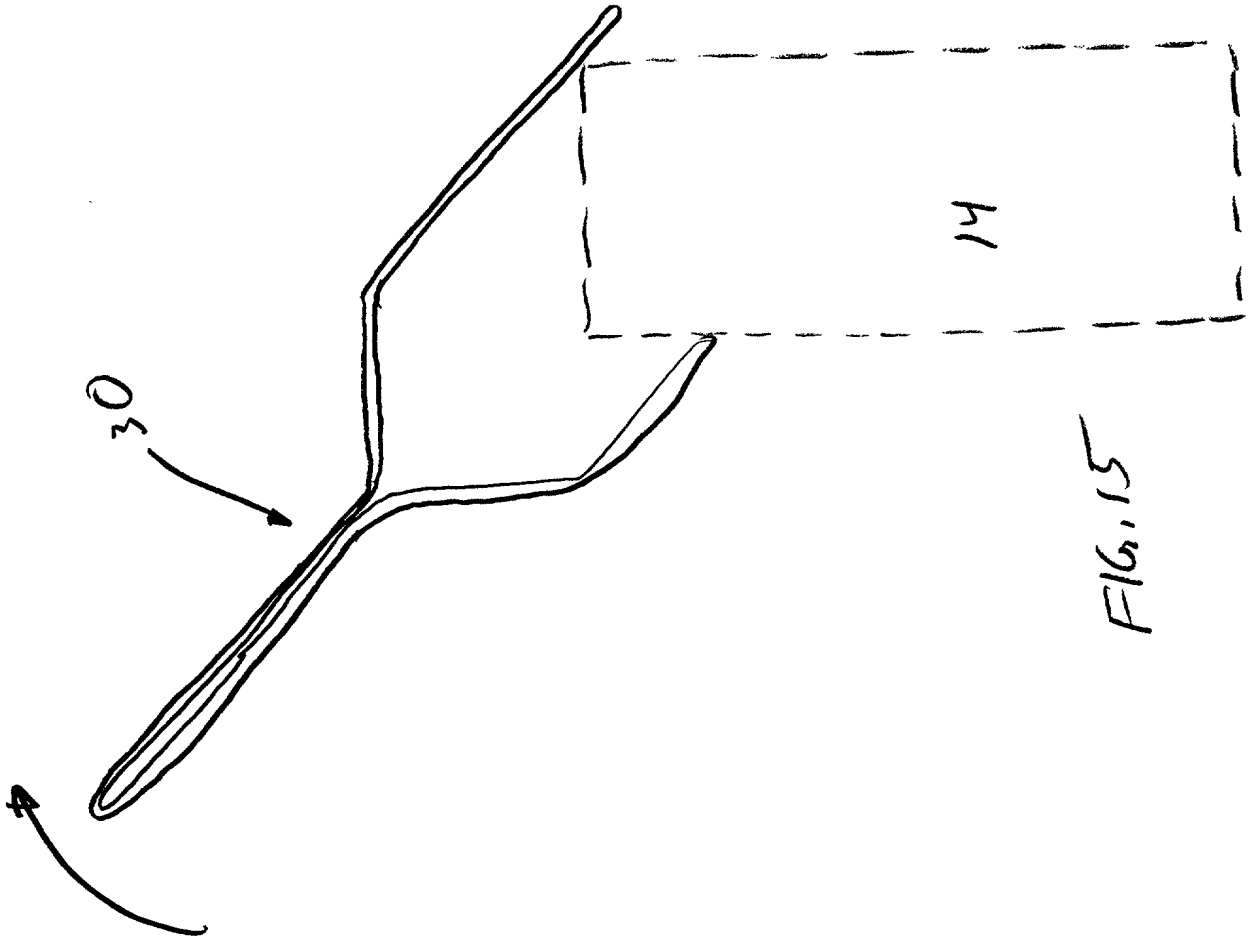


FIG. 15

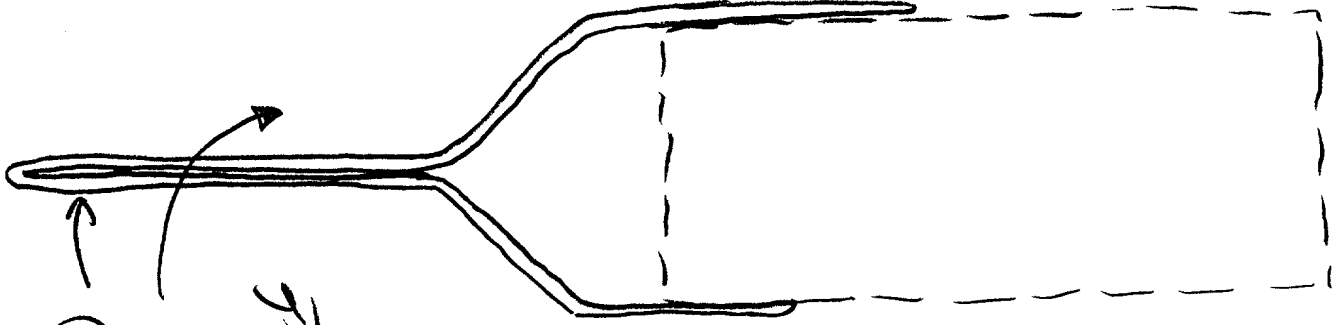


FIG. 16

FIG. 17 is a perspective view of a first embodiment of a device 10, which includes a first member 12 and a second member 14. The first member 12 is a rectangular plate with a central opening 16. The second member 14 is a rectangular plate with a central opening 18. The first member 12 and the second member 14 are joined together at their outer edges by a third member 16, which is a rectangular plate with a central opening 18. The first member 12 and the second member 14 are joined together at their outer edges by a third member 16, which is a rectangular plate with a central opening 18.

FIG. 17

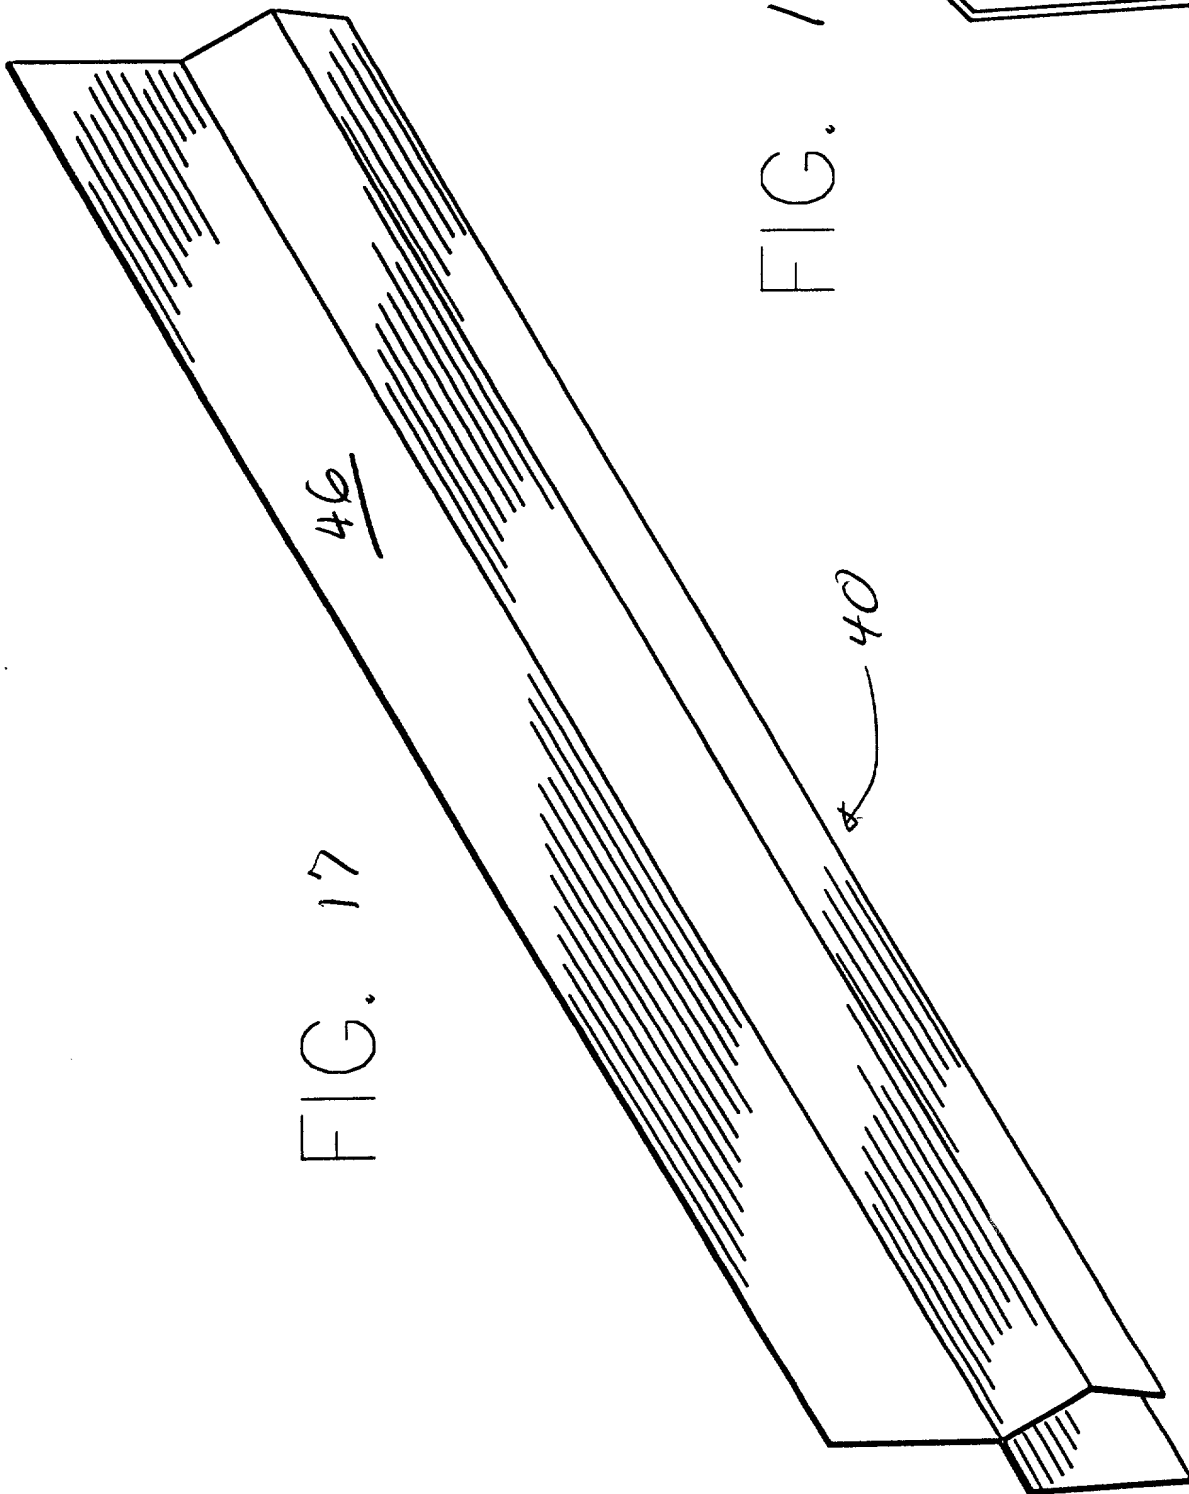
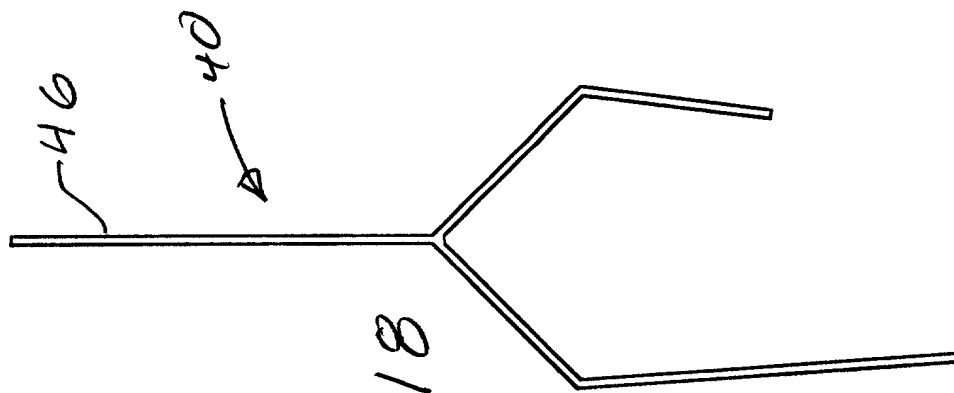
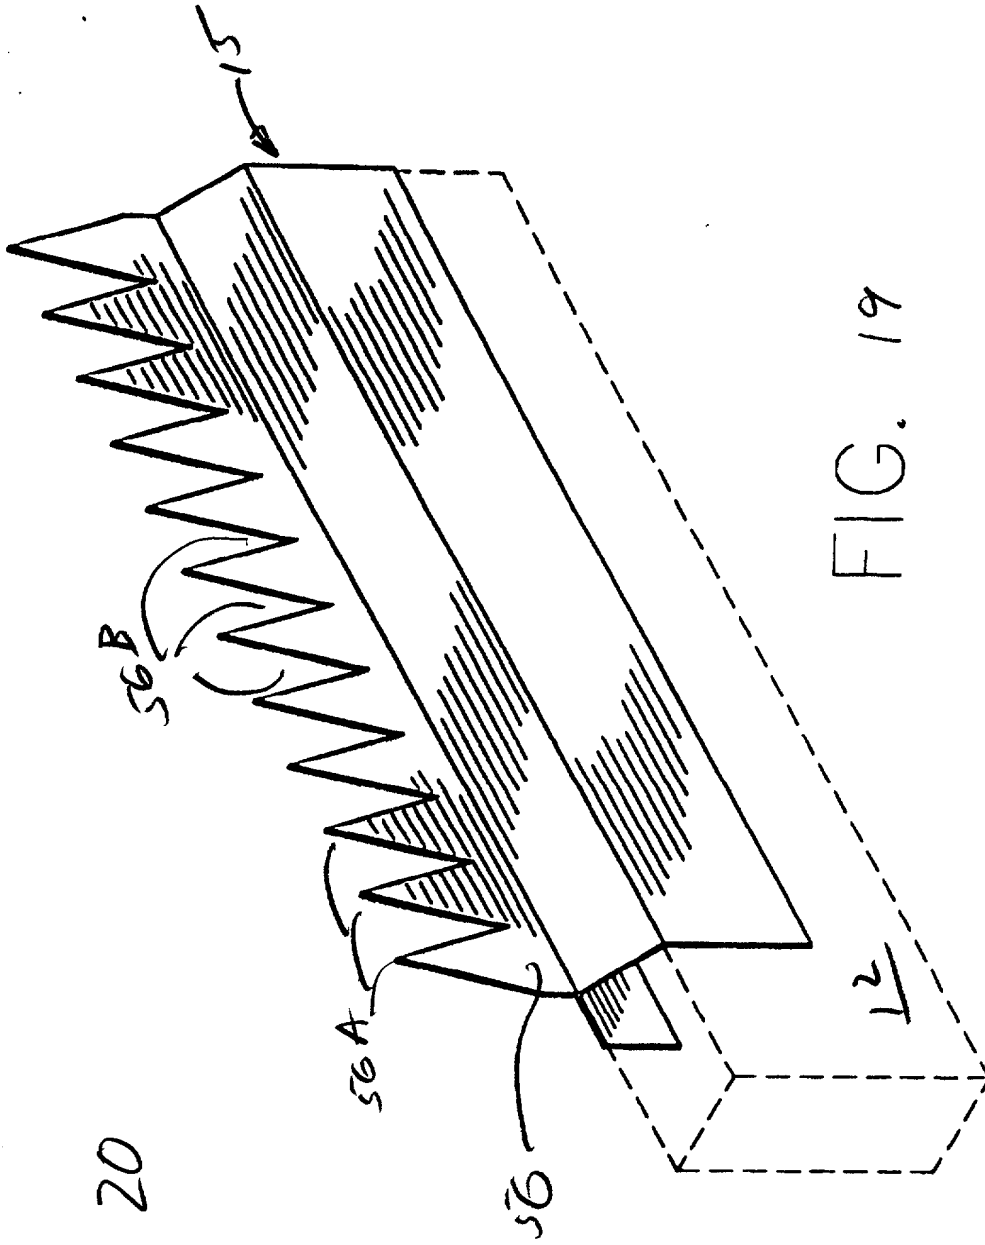
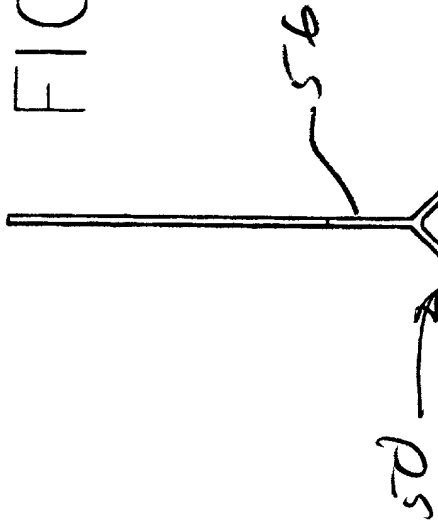


FIG. 18





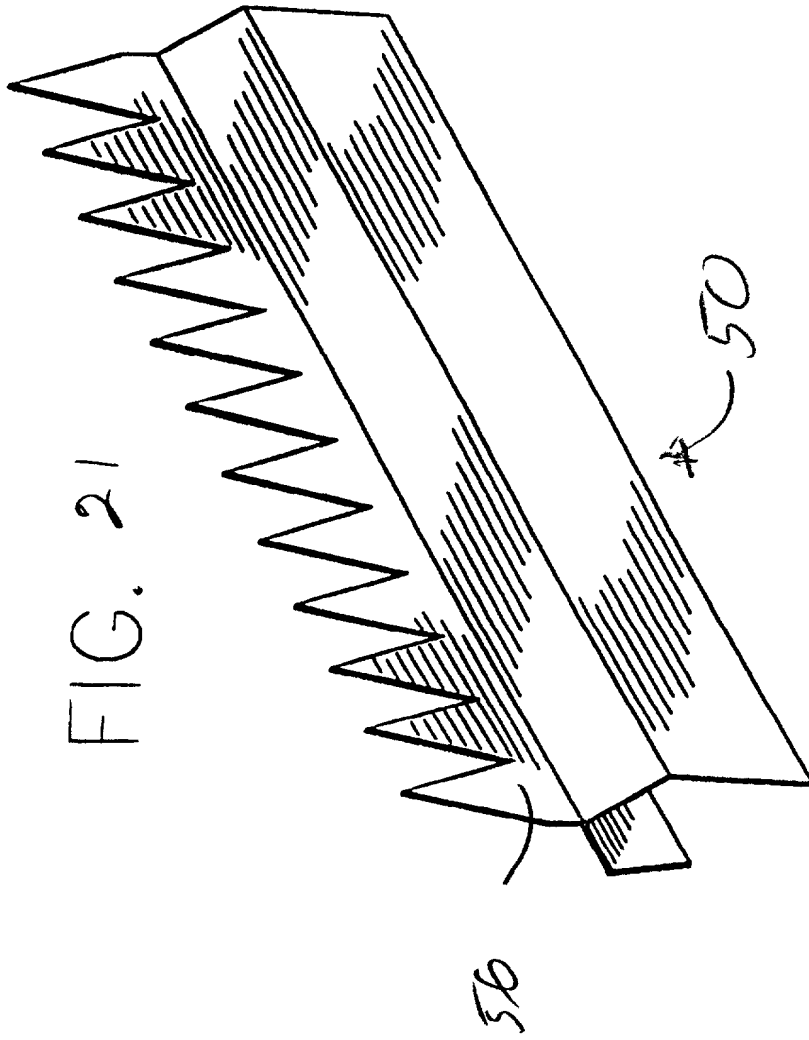


FIG. 21

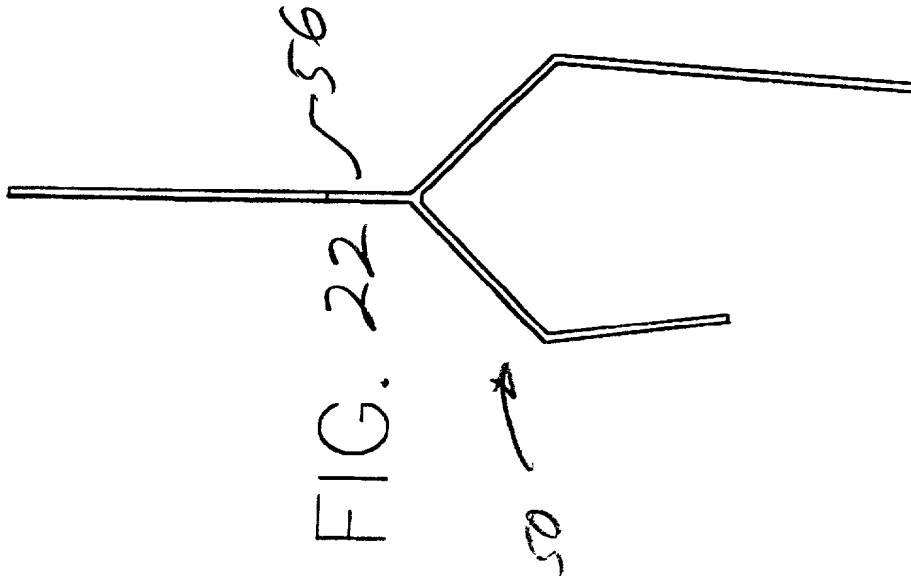


FIG. 22